


CLIENT TO ENSURE THAT THE SHADED AREA IS FREE FROM ANY OBSTRUCTIONS




ELEVATION (FROM INSIDE)

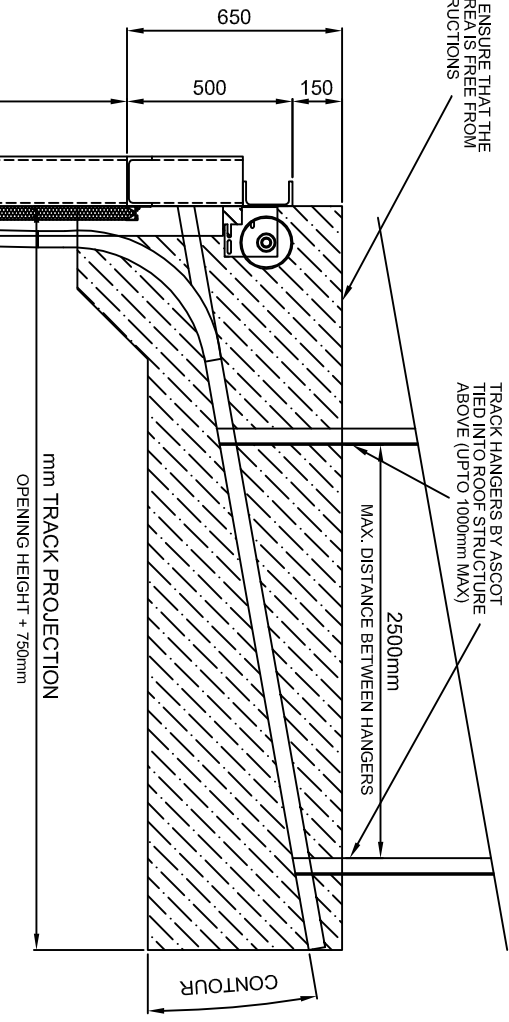

TRACK HANGERS BY ASCOT TIED INTO ROOF STRUCTURE ABOVE (UPTO 1000mm MAX)

MAX. DISTANCE BETWEEN HANGERS 2500mm

mm TRACK PROJECTION  
OPENING HEIGHT + 750mm

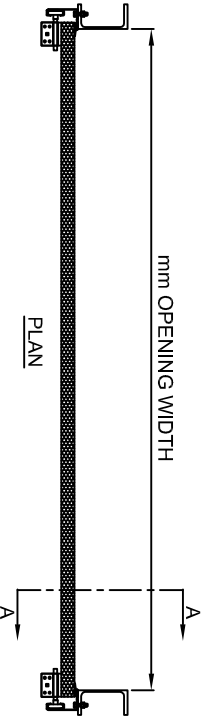

PLAN

ISOLATOR & POWER SUPPLY BY CLIENT  
3 PHASE - WITH NEUTRAL & EARTH  
400 VOLT, 50 HZ, 16 AMP ISOLATOR WITH  
5 PIN CEE SOCKET TO BE POSITIONED  
1.7M FROM THE END WITHIN 50MM  
OF THE DOOR ON THE MOTOR SIDE  
CONTROL PANEL & 1.0M LONG ARMOURD  
CABLE WITH 5 PIN CEE PLUG IS SUPPLIED  
BY ASCOT DOORS

OPERATION	
PANEL FINISH	
EXTERNAL COLOUR	
No. OF PANELS	
PANEL LENGTH	
DOOR WEIGHT	
CLIENT TO ENSURE:-	
1. OPENING IS PLUMB AND SQUARE.	
2. NO OBSTRUCTIONS OR SERVICES INTERFERE WITH OUR INSTALLATION.	
3. STRUCTURE IS CAPABLE OF CARRYING AN APPROX DOOR WEIGHT OF 15KG SQM WITHOUT DEFLECTION.	
4. TO MINIMISE INGRESS OF WATER IT IS RECOMMENDED THAT THE FLOOR SLAB SLOPES AWAY FROM THE DOOR.	

BRITANNIA WAY  
INDUSTRIAL  
PARK  
UNION ROAD  
BOLTON



BL2 2HE  
Tel: 01204 545801  
Fax: 01204 545800

CONTRACTOR CLIENT -  
PROJECT ADDRESS -

Drawn By

DATE -

DRAWING No:

Checked By

Approved By

TITLE: CONTOUR LIFT SECTIONAL OVERHEAD DOOR  
EXTRAS: CABLE BREAK DEVICE

PROJECTION

