
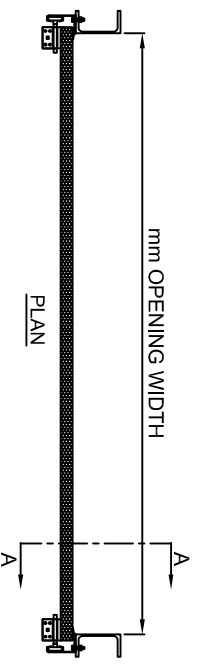
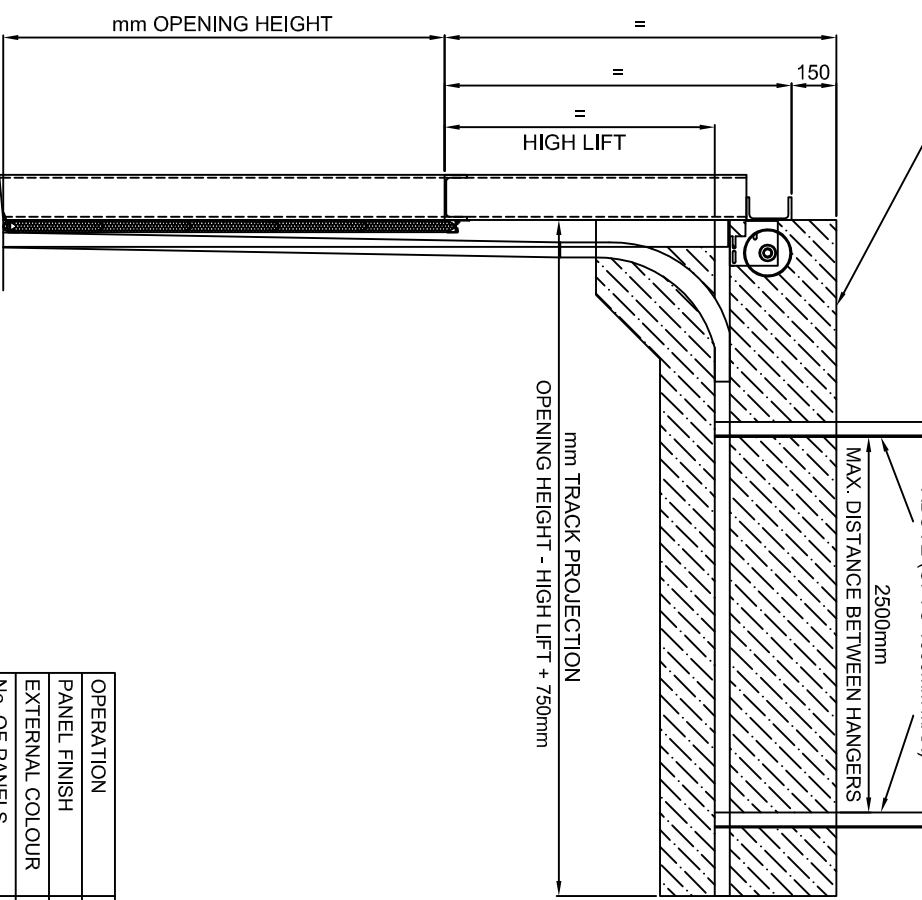


CLIENT TO ENSURE THAT THE SHADED AREA IS FREE FROM ANY OBSTRUCTIONS

TRACK HANGERS BY ASCOT TIED INTO ROOF STRUCTURE ABOVE (UP TO 1000mm MAX)

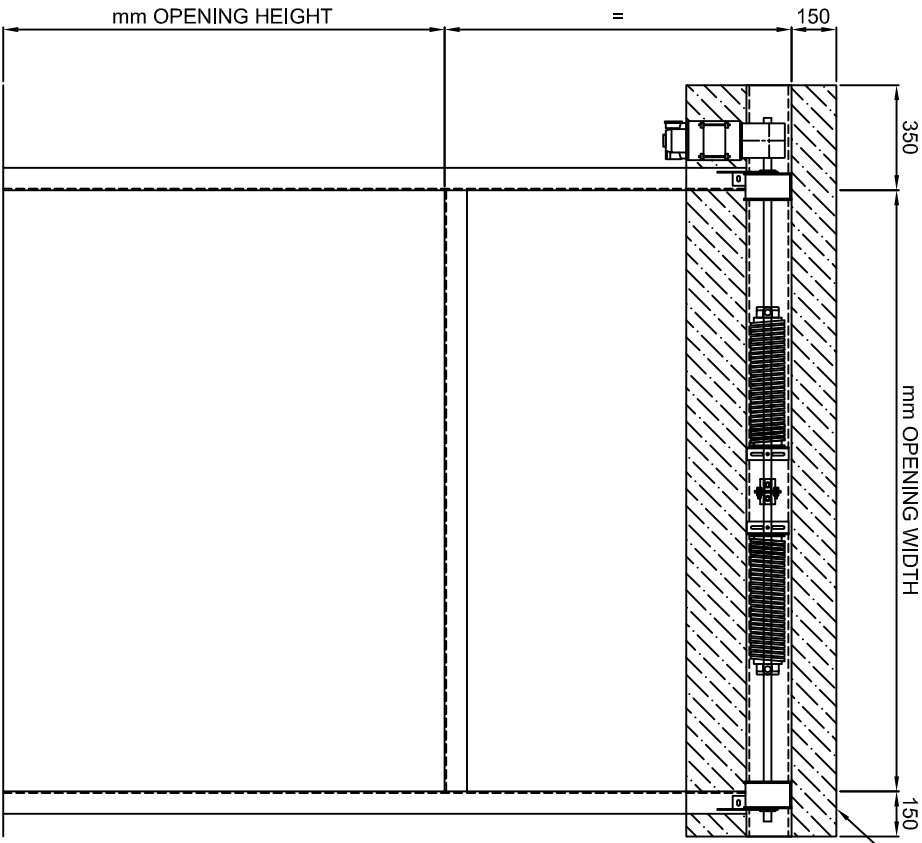

ISOLATOR & POWER SUPPLY BY CLIENT
 3 PHASE - WITH NEUTRAL & EARTH
 400VOLT - 50 Hz, 16 AMP/15A MOTOR WITH
 15 PIN CEE SOCKET TO BE POSITIONED
 1.7M FROM CEILING AND WITHIN 1 METRE
 OF THE DOOR ON THE MOTOR SIDE
 CONTROL PANEL & 1.0M LONG ARMOURD
 CABLE WITH 5 PIN CEE PLUG IS SUPPLIED
 BY ASCOT DOORS

- CLIENT TO ENSURE:-
1. OPENING IS PLUMB AND SQUARE.
 2. NO OBSTRUCTIONS OR SERVICES INTERFERE WITH OUR INSTALLATION.
 3. STRUCTURE IS CAPABLE OF CARRYING AN APPROX DOOR WEIGHT OF 15KG SQM WITHOUT DEFLECTION.
 4. TO MINIMISE INGRESS OF WATER IT IS RECOMMENDED THAT THE FLOOR SLAB SLOPES AWAY FROM THE DOOR.

OPERATION	
PANEL FINISH	
EXTERNAL COLOUR	
No. OF PANELS	
PANEL LENGTH	
DOOR WEIGHT	

ascot
DOORS

BRITANNIA WAY
INDUSTRIAL
PARK
UNION ROAD
BOLTON
BL2 2HE
Tel: 01204 545801
Fax: 01204 545800

CONTRACTOR CLIENT -

PROJECT ADDRESS -

Drawn By

DATE -

Checked By

Approved By

TITLE: HIGH LIFT SECTIONAL OVERHEAD DOOR

EXTRAS: CABLE BREAK DEVICE

PROJECTION

DRAWING No: _____

REV DESCRIPTION

BY CHK DATE